



# FACED VERSATILE BLANKET OEM FIBERGLASS PRODUCT



## Product Specifications and Key Features

Quietflex Faced Versatile Blanket is produced using textile-type glass fibers that have been chopped to a length of 2 to 6 inches and bonded with a thermal setting phenolic resin. The glass fibers and resin are combined in an air lay system that produces a random fiber orientation for exceptional strength and resiliency coupled with thermal and acoustic performance. The black mat facing is applied during the manufacturing process to ensure a tough and durable bond between the base blanket and the facing. Available in amber color, with either FSK or black mat facing. This product is available in many configurations to meet our customers' specific requirements.

[www.quietflex.com](http://www.quietflex.com)

## ADVANTAGES

- **High thermal efficiency**  
Reduces heat transfer, lowering energy consumption
- **High acoustical performance**  
Reduces unwanted noise
- **Excellent bond strength**  
Resists separation or damage during fabrication and after installation, preventing it from falling apart
- **Increased tensile strength**  
Resists damage during fabrication and installation
- **Enhanced thickness recovery/resiliency**  
Resists settling and breakdown from vibration and impact
- **Excellent dimensional stability**
- **Resistance to vibration**  
Due to excellent bond strength
- **Ease of handling and fabrication**  
Easily die-cut or trimmed
- **Fibers are non-combustible and do not absorb water**  
Resistant to bacterial and fungal growth
- **Compression packed**  
Saves freight costs, storage space and protects against damage

## APPLICATIONS

- **HVAC equipment**  
Fan coils, air conditioners, furnaces, other HVAC equipment
- **Die-cut applications**
- **Other OEM equipment**

## THICKNESS AND DENSITY

THICKNESS	MIN DENSITY	MAX DENSITY
inch	lb/ft <sup>3</sup>	lb/ft <sup>3</sup>
0.5	1.50	3.00
1.0	1.00	4.00
1.5	0.75	4.00
2.0	0.75	3.00
2.5	0.75	2.40
3.0	0.75	2.00
3.5	0.75	1.70
4.0	0.75	1.50
5.0	0.75	1.20
6.0	0.75	1.00

## SIZE

WIDTH	LENGTH	THICKNESS
Minimum: 6" Maximum: 120"	Length will be based on density and width to keep roll weights under 130 lbs.	Between 1/2" and 6"



# FACED VERSATILE BLANKET

OEM FIBERGLASS PRODUCT

## PHYSICAL PROPERTIES

TEST METHOD OR PROPERTY	DESCRIPTION	RESULTS FOR FACING TYPES
Temperature range	Operating temperature	-247°F to 450°F [-155°C to 232°C]
ASTM C411	Standard test method for hot-surface performance of high temperature insulation	Passes up to 450°F [232°C] both facings
ASTM C553 Type 1, 2 and 3	Standard specification for mineral fiber blanket thermal insulation for commercial and industrial applications	Passes all requirements at varying densities both facings
ASTM E162	Radiant panel	Passes class A FSK radiant panel index = 0 Black Mat radiant index = 10
ASTM C1304	Odor	Passes, not objectionable both facings
NFPA 259, 90A and 90B limited combustibility	Standard test method for potential heat of building materials (less than 3500 BTU/lb [8141 kJ/kg])	Passes
ASTM C665	Corrosion resistance	Passes with aluminum, steel or copper both facings
ASTM C1104	Water vapor sorption	Passes less than 1.0% by weight.
ASTM E84 and UL 723 Fire	Flame spread index	Passes class A target less than or equal to 25.
ASTM E84 and UL 723 Smoke	Smoke developed index	Passes class A target less than or equal to 50.
ASTM C1338, G21, G22	Test methods for determining resistance of insulation materials and facings to fungi and bacteria	Passes, does not support the growth of mold, fungi or bacteria both facings
ASTM C1071 / UL 181	Air erosion	Passes up to 5000 FPM
ASTM C423	Sound absorption coefficients, 1/3 octave bands Unit: Sabins/ft <sup>2</sup>	Passes, see Note A →
Density tolerance	Material property	+/-15%
Width tolerance	Material property	+/-0.25 in or -0 in/+0.5 in
Length tolerance	Material property	+2% or +2 ft/-0 ft
Thickness tolerance	Material property	+/-0.25 in or -0 in/+0.5 in
Optional facings available	Material property	Laminated FSK and black mat facing
Tensile strength*	Material property	> = 1 PSI [6.6 kPa]

\* Tensile strength based on unfaced product only

## NOTE A: 1" thickness at 2 lb/ft<sup>3</sup> density (Passes ASTM C423)

Frequency (Hz)	1 in. Unfaced Versatile	1 in. FSK-Faced Versatile	1 in. Black Mat Faced Versatile
100	0.02	0.02	0.07
125	0.11	0.15	0.07
160	0.13	0.26	0.16
200	0.19	0.41	0.16
250	0.24	0.46	0.24
315	0.32	0.40	0.35
400	0.38	0.52	0.43
500	0.47	0.81	0.53
630	0.55	1.00	0.64
800	0.62	1.03	0.72
1000	0.69	1.02	0.80
1250	0.76	0.90	0.81
1600	0.79	0.74	0.86
2000	0.84	0.58	0.91
2500	0.87	0.42	0.93
3150	0.88	0.33	0.93
4000	0.89	0.26	0.93
5000	0.88	0.21	0.92
SAA	0.56	0.69	0.62
NRC	0.55	0.70	0.60

**Note on Single Number Ratings:** The Sound Absorption Average (SAA) is calculated as the arithmetic average of the all absorption coefficients from 200 - 2500 Hz, inclusive. The Noise Reduction Coefficient (NRC) is calculated as the arithmetic average (rounded to the nearest 0.05) of the absorption coefficients in the shaded bands only (250, 500, 1000 & 2000 Hz).




# FACED VERSATILE BLANKET

OEM FIBERGLASS PRODUCT

## THERMAL VALUES @ 75°F mean temperature (ASTM C 518)

DENSITY	THICKNESS	K-VALUE*	C-VALUE	R-VALUE
lb/ft <sup>3</sup>	inch	BTU-in/h-ft <sup>2</sup> -°F	BTU/h-ft <sup>2</sup> -°F	h-ft <sup>2</sup> -°F/BTU
0.75	1.0	0.365	0.37	2.7
	1.5		0.24	4.1
	2.0		0.18	5.5
1.00	1.0	0.325	0.33	3.1
	1.5		0.22	4.6
	2.0		0.16	6.1
1.50	0.5	0.284	0.57	1.8
	1.0		0.28	3.5
	1.5		0.19	5.3
	2.0		0.14	7.0
2.00	0.5	0.263	0.53	1.9
	1.0		0.26	3.8
	1.5		0.18	5.7
	2.0		0.13	7.6
3.00	0.5	0.240	0.48	2.1
	1.0		0.24	4.2
	1.5		0.16	6.3

\*K-Value: Nominal thermal conductivity is shown. Value tolerance is + or - 10%

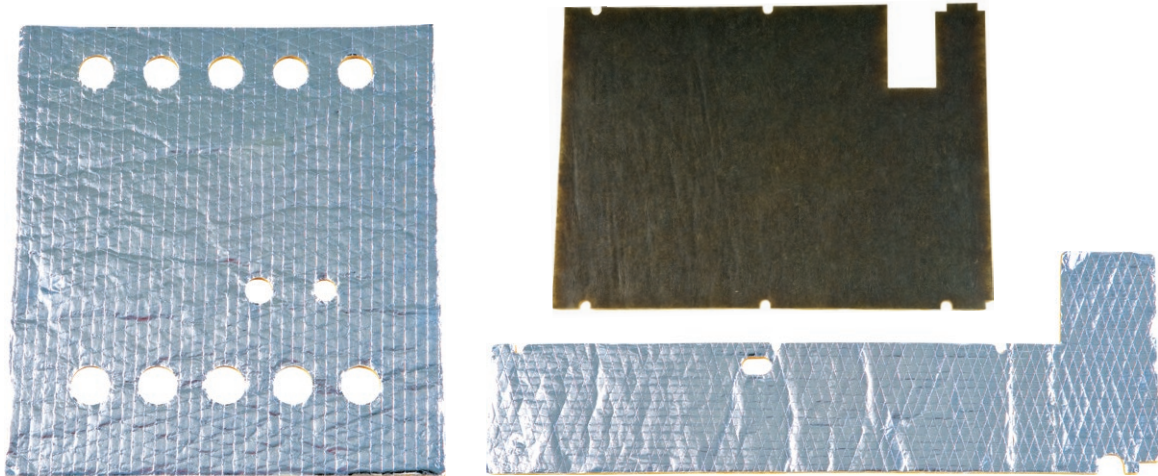

4518 Brittmoore Road • Houston, Texas 77041 • 713.849.2163 • [quietflex.com](http://quietflex.com)

### WARNING

Textile glass fibers are used to manufacture the fiberglass insulation product. Handling, installing, or removing the product may result in some fiberglass contact. Users of this product are therefore advised to wear appropriate personal protective equipment so as not to experience skin, eye, or respiratory irritation. Gloves and eye protection, long sleeved, loose fitting clothing are recommended when installing or otherwise handling the product. Avoid breathing fiberglass dust and avoid contact with skin or eyes. A NIOSH approved (N95 or higher) disposable or reusable dust respirator properly fitted is recommended whenever the product is handled. Respiratory protection is mandatory when the dust level in the workplace exceed OSHA permissible exposure limits or if worker irritation occurs. Work clothes should be washed separately and the washer rinsed after use.

### FIRST AID MEASURES

If dust gets in eyes flush eyes with water to remove the fiber dust. If symptoms persist, seek medical attention. Fibers can be removed by washing the skin with soap and warm water after handling this product. Further product safety information is available from your employer. The Material Safety Data Sheet is available from your distributor, directly from QuietFlex or on the QuietFlex website at [www.quietflex.com](http://www.quietflex.com).

The physical and chemical properties of the QuietFlex Faced Versatile Blanket represent typical, average values obtained in accordance with accepted test methods and are subject to normal manufacturing variations. The data is supplied as a technical service and is subject to change without notice. Check with QuietFlex Manufacturing Company LP to obtain current information.